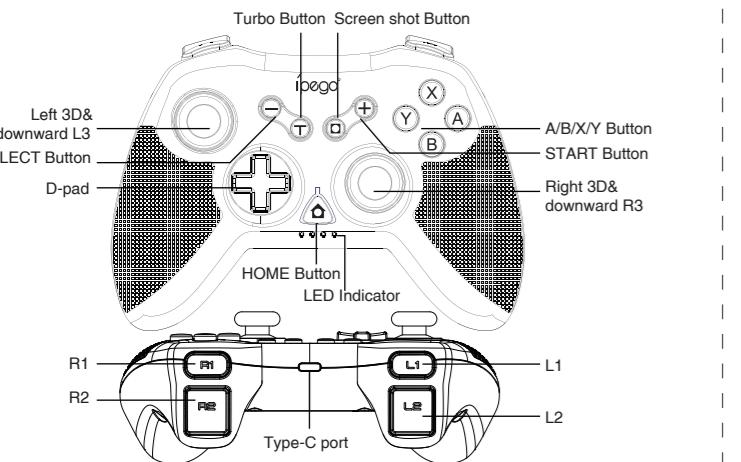


**N-S BT Gamepad Parent-child Edition**


User Manual(PG-SW019)

Product Application:

- This kit includes two Controllers, one parent edition and one child edition, used for playing games on N-S console /P3/ Android and PC (Win 7 /8/10).
- Function button of this gamepad is one-one corresponding with N-S_pro gamepad, and with TURBO continuous function.
- This controller support vibration and six axis gyroscope function, provide better game experience for game player.
- Ergonomic design, feels comfortable.
- Due to the official game platform software upgrades or source code changes and other non-resist factors caused some of the game can not be played or connected with our Gamepad, iPega company has no responsibility. iPega reserve the right of final interpretation for this.




Button Illustration**Electrical Parameters:**

- Working voltage: DC3.7V
- Working current: <30mA
- Static current: <20uA
- Continuous gameplay time: >15H
- Input voltage/current: DC5V/500mA
- Charging time: about 3 hours
- BT 3.0, transmission distance: ≤8M
- Battery capacity: 400mAh/ 380mAh
- Standby time: up to 30 days once fully charged


**Android Mode :**

(for Android standard HID mode, Note: under Android mode, no vibration & six axis gyroscope function):

While the controller is off, long press Y + HOME key at same time for 2 seconds to enter Android standard paired mode. The LED1 light flash quickly, when the Android phone/Android tablet/Android smart TV search the big controller "PG-SW020" bluetooth name, and the small controller "PG-SW022" bluetooth name, select corresponding controller paired! After pairing successfully, LED1 will be always on! Once successfully paired, press the HOME key, LED1 flash slowly, reconnect automatically!

**PC wired connect mode:**

- While the controller is turn off, long press L1+HOME combination key for 2 seconds to turn on the gamepad, LED4 flash quickly, connect the gamepad to PC via the USB cable, now is PC and P3 wired mode, and LED2 will be always on.
- By long pressing the HOME key for 3 seconds can be switched to PC Xb 360 mode, and the LED3 will be always on.
- Note: Wired connection mode, just support vibration function, no six axis gyroscope function.

**Operation mode:**

	Android System	N-S console
Paired mode (long press 3 seconds)	Android wireless mode Y+Home	Android wired mode L1+Home
Indicator	LED 1	LED 1
Remark	Not support vibration and six axis function	Support vibration and six axis function

	P3 Console	PC
Paired mode (long press 3 seconds)	P3 wireless mode A+Home	P3 wired mode L1+Home
Indicator	Console assign automatically	PC P3 mode: LED2 PC 360 mode: LED3
Remark	For wireless mode, should insert the USB cable to enter searching status, once paired successfully, unplug the USB cable, then the gamepad enter the wireless connection mode.	Support vibration but not six axis function

3.Sleep/wake up function: the controller will enter into sleeping mode automatically, if there are no operation within 5 minutes, press the HOME key to wake up and reconnect when need to restart.

4.When the power is low, the corresponding LED flash quickly;

Notes:

- Please do not store this product in wet or high-temperature areas.
- Don't knap, beat, drub, pierce, or try to decompose this product, to avoid unnecessary damage to the product.
- The product has built-in batteries, and please don't discard them together with the garbages.
- Non professional personnel should not disassemble the product, otherwise it will not be covered in the after-sales warranty service.
- Due to the official game platform software upgrade or source code changes and other non-resist factors caused some of the game can not be played or connected with our gamepad, iPega company has no responsibility, we reserves the right of final interpretation for this.

Accessories List**N-S 无线手柄亲子套装版**

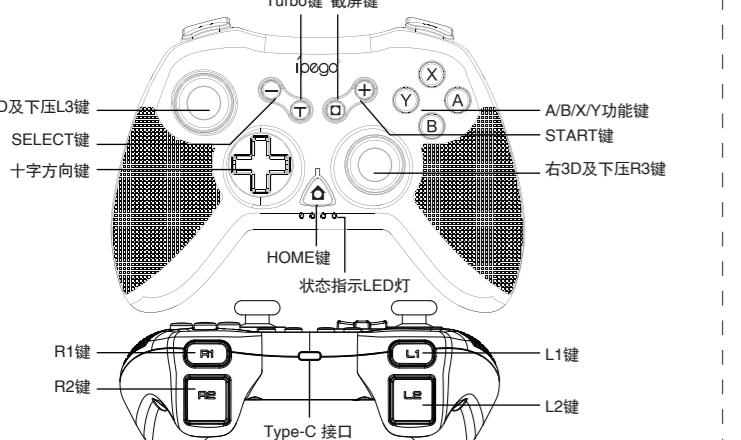
产品说明书(PG-SW019)

产品适用说明:

- 本亲子套装手柄包含一大一小两个手柄，适合操作N-S/P3/安卓及电脑(Win7+)设备上的游戏。
- 手柄的功能按键一一对应N-S_pro手柄的按键功能，并且支持TURBO连打功能。
- 本手柄支持震动及六轴功能，使玩家得到更好的游戏体验。
- 结构符合人体工程学，手感舒适。

* 因官方游戏平台软件升级或源代码变更等不可抗拒的因素造成部分游戏无法与本产品连接操作，我公司不负任何责任。对此我公司保留最终解释权。

技术支持QQ号: 83750687
客服电话: 0755-2791 8998
在线时间: 周一至周五9:30-17:30

功能按键图示**产品特性参数:**

- 工作电压: DC3.7V
- 工作电流: <30mA
- 静态电流: <20uA
- 持续使用时间: >15H
- 输入电压/电流: DC5V/500mA
- 充电时间: 约3小时
- 无线3.0, 传输距离: ≤8M
- 电池容量: 400mAh/ 380mAh
- 待机时间: 满电放置30天



产品使用说明:**N-S主机连接:**

- 首次连接手柄到主机: 打开N-S 主机，在N-S主机主界面，用手指触摸点击: 手柄
—>更改操作顺序，进入到主机配对模式界面。(图1-2)
- 在手柄关机状态下，按B+HOME组合键2秒开启手柄并进入配对模式，手柄上的LED2灯开始快速循环闪烁，当单个或多个LED常亮时（主机自动分配）、手柄与主机配对成功，然后按A键操作。(图3-4)
- 已成功连接过：通过长按HOME键2秒开启手柄，手柄与主机自动连接，然后按A键进行操作。


**安卓设备连接**

(安卓标准HID模式, 备注: 安卓模式下, 无震动功能、无六轴功能)

在手柄关机状态下，同时按Y+HOME键2秒进入安卓标准游戏配对模式，手柄LED1灯快闪，当安卓手机/安卓平板/安卓智能电视搜索到大手柄时显示设备名：“PG-SW020”，搜索到小手柄时显示设备名：“PG-SW022”，选择相应设备配对连接。连接成功后，手柄LED1灯常亮：已成功连接过，可以直接按HOME键，LED1灯慢闪，自动回连。推荐下载游戏平台：手机扫描说明书首页二维码关注艾派格官方公众号，按提示下载并安装游戏平台（葡萄游戏厅），进入平台下载所需要的游戏中。

**P3主机连接:**


- 在手柄关机状态下，长按A+HOME组合键2秒开机，手柄4个LED指示灯同时闪烁，当安卓手机/安卓平板/安卓智能电视搜索到大手柄时显示设备名：“PG-SW020”，搜索到小手柄时显示设备名：“PG-SW022”，选择相应设备配对连接。连接成功后，手柄LED1灯常亮，进入P3模式操作。
- 配对成功后，对应的通道LED长亮，手柄进入P3模式操作。
- 按插USB线，手柄进入无线连接。

**TURBO功能开启/关闭:**

- 动作键包括(A/B/X/Y/L/ZL/R/ZR) 8个按键，均可手动设置TURBO功能。
- 设置方法：长按动作键，同时再轻按TURBO键，TURBO功能开启；长按动作键，同时轻按TURBO键，TURBO功能关闭。
- 产品断开连接后，之前设置TURBO功能自动清除，若启用TURBO功能时，必须重新设置。

有线连接安卓设备/P3主机:

- 在手柄关机状态下，长按L1+HOME组合键2秒开机，手柄LED4灯快闪，用USB数据线将手柄连接到安卓设备/P3主机时，手柄LED2灯长亮（主机自动分配），连接成功。
- 安卓设备不支持震动、六轴功能。

**操作使用模式:**

	安卓系统	N-S主机
模式配对(长按3秒)	安卓无线模式 Y+Home	安卓有线模式 L1+Home
指示灯	LED 1	LED 1
备注	不支持震动、六轴	支持震动、六轴

产品清单:**产品清单****手柄充电/休眠/唤醒/关机功能:**

- 手柄充电/休眠/唤醒功能
 - 关机状态下充电时LED1-LED4指示灯同时闪烁，充满熄灭。
 - 开机连接设备时充电当前LED指示灯闪烁，充满长亮。
 - 睡眠/唤醒功能：手柄在5分钟内不使用会进入休眠状态。当需要重新使用时按HOME键唤醒即可回连。
 - 电池电量不足时，对应的指示灯快闪提示。

注意事项:

- 请不要把本产品在潮湿或高溫地方存储。
- 不要敲击、摔打、刺穿，或试图去分解本产品，以免对产品造成不必要的损害。
- 产品内置电池，请勿丢弃或丢弃。
- 非专业人员误拆卸本产品，否则不在售后保修服务内。
- 因官方软件升级或源代码变更等不可抗拒的因素造成部分游戏无法与本产品连接操作，我公司不负任何责任。对此我公司保留最终解释权。