

# PG-9028说明书 80g米黄色特种纸,双面折页 尺寸: 630x142mm

正面

**iPega®**  
**触摸蓝牙游戏手柄**  
 产品说明书(PG-9028)中文版

**适用说明:**

- 1.非常感谢您购买ipega公司开发生产的触摸蓝牙游戏手柄;
- 2.产品主要适用于在Android/iOS/Win 7/8/10系统上蓝牙连接时,进行游戏操作时使用!
- 3.适用设备:智能手机/平板电脑/智能电视机、机顶盒/PC电脑(Windows系统)
- 4.安卓和iOS系统均支持多媒体功能:音量+、上一曲、播放/暂停、下一曲、音量-;
- 5.结构符合人体工程学,手感舒适;

★因官方游戏平台软件升级或源代码变更等不可抗拒的因素造成部分游戏无法与本产品连接操作,我公司不承担任何责任。对此我公司保留最终解释权。

售后客服QQ群: 344494518  
 客服电话: 400-806-3006  
 在线时间: 周一至周五9:30-17:30



艾派格官方微信公众账号  
 (关注请扫码 下载iOS游戏大厅)

**功能按键图示:**



LT键, RT键, 触摸板, R1键, L1键, 左3D及下压L3键, 十字方向键, SELECT键, 模式指示灯, HOME键, 多媒体功能键, USB接口, A/B/X/Y功能键, 充电指示灯, 右3D及下压R3键, START键

**安卓设备使用说明:**



- 1.同时按住X键和HOME键2秒,此时SEARCH指示灯快闪,如图1
- 2.将Android设备端的蓝牙功能打开,点击“扫描”,如图2.
- 3.当搜索到蓝牙名为“PG-9028”的设备时选择配对连接;图2
- 4.连接成功,SEARCH指示灯常亮!图3
- 5.手机扫描二维码下载游戏平台,进入平台下载所需要的游戏。



安卓游戏平台 下载二维码  
 安卓按键映射APP 下载二维码

**触摸板操作说明:**

支持鼠标触摸功能,在安卓或PC平台(仅限蓝牙连接模式)下操作更加方便快捷!

- 1.要移动光标,请在感应区域上轻轻移动手指;
- 2.要选择对象,请在触摸板表面轻轻点击一次;
- 3.要双击一个对象,请将光标定位在对象上,然后双击两次。



**iOS游戏大厅模式**



支持iOS非越狱设备,支持第三方游戏平台,此模式仅限中国大陆地区使用

- 1.同时按Y键和HOME键2秒,此时SEARCH指示灯快闪,如图1.
- 2.将iOS设备端的蓝牙功能打开,当搜索到蓝牙名为“Newgamepad N1”的设备时,选择配对连接;图2
- 3.连接成功,SEARCH指示灯常亮;图3
- 4.支持iOS设备9.3.0以上系统;
- 5.手机扫描二维码下载游戏平台,进入平台下载所需要的游戏。



艾派格游戏大厅映射方法

**iOS按键映射功能:**

- 1.支持iOS第三方游戏平台,如需要更改按键功能,在游戏厅内操作手柄即可更改;
- 2.艾派格游戏大厅映射方法:同时按下START+SELECT组合按键调出映射菜单;
- 3.方格游戏厅映射方法:同时按下SELECT+L3组合按键调出映射菜单;
- 4.将需要映射的按键,拖到相应的触摸功能键上与之重叠保存后即可操作游戏!
- 5.部分原生支持手柄的游戏不能调用映射菜单。



艾派格游戏大厅映射方法

**蓝牙连接PC设备操作方法**

- 1.(带蓝牙功能的电脑请直接跳至第2.2步)手柄关机状态下,同时按住手柄X+HOME键搜索蓝牙设备;
- 2.将蓝牙4.0接收器插入PC设备的USB接口,Windows系统会自动安装驱动程序;
- 2.1驱动程序安装成功后,会在电脑的右下角显示蓝牙设备的符号,如图1;
- 2.2将鼠标移动到蓝牙符号处,单击鼠标右键,选择“添加设备”,如图2;
- 2.3选择“添加设备”后,会在对话框内搜索到设备的型号(PG-9028)图标,如图3
- 2.4点击“下一步”,并选择“不使用代码进行配对”,确认后则会自动添加,提示蓝牙连接成功连接OK后,指示灯常亮!如图4;
- 2.5蓝牙连接成功后为360模拟器模式,支持以模拟器方式运行的游戏!



**手柄充电/休眠/唤醒功能:**

- 1.充电时CHARGE指示灯常亮,充电后熄灭!
- 2.睡眠/唤醒功能:游戏手柄在5分钟内不使用会进入休眠状态,当需要重新使用时需按HOME键唤醒即可回连;
- 3.电池电量不足时CHARGE指示灯快闪提示;



充电接口

**操作使用模式:**

Android 系统		
模式名称	安卓标准游戏模式	鼠标模式
模式配对(长按2秒)	X+Home	Y+Home
指示灯	SEARCH	SEARCH
备注	在安卓标准游戏模式下按Y+HOME可动态切换到鼠标模式	

Windows 系统		
模式名称	iOS 游戏大厅模式	360 模拟器模式
模式配对(长按2秒)	Y+Home	X+Home
指示灯	SEARCH	SEARCH
备注	支持iOS非越狱设备 需蓝牙适配器	

**电性参数:**

1.工作电压: DC3.7V	5.充电电压/电流: DC5V/500mA
2.工作电流: 30 mA	6.蓝牙传输距离: ≤8M
3.持续使用时:10H	7.电池容量: 380mAh
4.静态电流: <35uA	8.待机时间: 满电放置30天

**注意事项:**

- 1.请不要把本产品放在潮湿或高温地方存储;
- 2.不要敲击、摔打、棒打、刺穿,或试图去分解本产品,以免对产品造成不必要的损害;
- 3.产品内置电池,请勿和垃圾一起丢弃;
- 4.不要在靠近火源或其它热源的地方对手柄进行充电。
- 5.非专业人员请勿拆卸本产品,否则不在售后维修服务内;

**常见问题:**

问: 为什么在iOS手机“App Store”里下载的游戏用手柄操控不了?  
 答: 因iOS的协议限制, iOS的游戏需在游戏平台内下载游戏,平台内的游戏跟手柄适配过的。(之前已经下载的游戏要卸载,以免有冲突)。

问: 游戏时按键不受控,或混乱怎么办?  
 答: 将手柄关机重新连接,连接过程中请不要碰触其它按键

问: 手机蓝牙打开无法搜索到手柄?  
 答: 1: 取消掉手柄与手机之前的蓝牙配对设备名,重新开启手机蓝牙搜索配对  
 2: 使用回形针按下手柄背面的复位孔

问: 新手柄为什么不开机?  
 答: 1: 新手柄一触电量不足,请用包装盒内的USB线上5V充电器,给手柄充电,充满电后再按开机键开机。  
 2: 如果手柄接上电源(5V)后指示灯还是不亮,请用回形针按下手柄背面的复位孔

**配件清单:**



游戏手柄 x1  
 说明书 x1  
 Micro USB线 x1

**iPega与ePega商标同属于PEGA LIMITED所有。**  
 专利号: ZL2014301708600

反面

**iPega®**  
**Touchable Bluetooth Controller**  
 Item Code: PG-9028

**Applicable instructions**

Thanks for purchasing iPega developed Touchable Bluetooth Gamepad.

This Gamepad support playing games on Bluetooth enabled Android 3.2+ / smart phone/ TV box/ smart TV/ VR, Win7/ Win8/ Win10 PC without any drivers.

Multimedia player buttons "volume +, -, "last", "next" "Play / Pause" can be used under Android system devices.


With Mouse touch function, support touchpad operation under Android system after Bluetooth connected successfully.

Ergonomic streamlining, the product surface is rubber oil, comfortable hand hold feelings.

★ Due to the official game platform software upgrades or source code changes and other not resist factors caused some of the game can not be played or connected with our Gamepad, iPega company has no responsibility. iPega reserve the right of final interpretation for this.


★ iOS devices (iPhone/iPad) has authorization limited, so currently for Chinese user only.

**Introduction for key functions:**

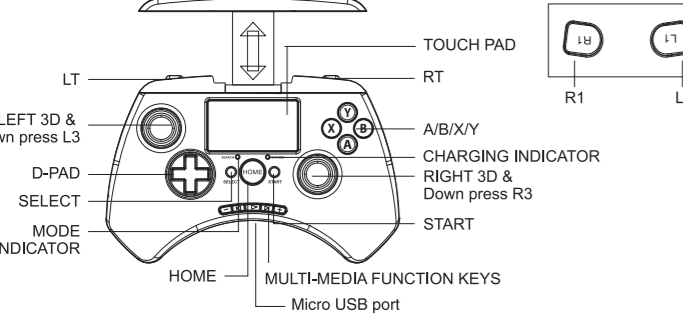

LT, RT, TOUCH PAD, R1, L1, LEFT 3D & Down press L3, D-PAD, SELECT, MODE INDICATOR, HOME, MULTI-MEDIA FUNCTION KEYS, Micro USB port, A/B/X/Y功能键, CHARGING INDICATOR, RIGHT 3D & Down press R3, START键


**Usage of Android device**



1. Press and hold X button + HOME button for 2's, then release two buttons until SEARCH LED flash quickly. Refer Pic1
2. Open the Bluetooth on Android device, click searching, find and select "PG-9028" for Bluetooth pairing. Refer Pic2
3. SEARCH LED lit on after Bluetooth connected. Refer Pic3
4. Then you are ready for playing games on Android devices.

**Important notice for games capability in this mode:**

1. Download simulator games from the third party Games App. Scan the QR code or input www.xiaojj001.com to your phone browser to download the Android Game Center App, there has vast of most popular available games supporttable.
2. Download gamepad enabled games (similar console games as below) from Google Playstore which you can play directly. You can map button in the game settings for some of the game, such as ShadowGun, Recommend console game list: Implosion / Dead Trigger / Dead Effect / CS Portable / The dungeon hunter 4 glory palace / Shadowgun: DeadZone / SoulCraft - Action RPG
3. If you want play some of the online games such as PUBG, Mobile lenges, Rules of survival etc which downloaded from Google Playstore, then you need download the Octopus driver for buttons mapping, check the operation guide video on PEGA HK Youtube.



Scan to download Android Game Center:  
 www.xiaojj001.com  
 Octopus Driver:  
 http://www.phoenixs.com/octopus/intro


**Usage of Windows PC by Bluetooth connecting:**

1. With the gamepad off, press and hold gamepad button X + HOME simultaneously for searching the Bluetooth device, and the SEARCH indicator flash quickly. (If your PC has Bluetooth function, please go to step 2.2)
2. Insert Bluetooth 4.0 Dongle (Not included in the package suggest purchase Bluetooth 4.0+ Dongle Separately) into the USB interface on PC device; Windows system will automatically install the driver.
- 2.1 After the driver is installed successfully, the symbol of the Bluetooth device will be displayed in the lower right corner of the computer.
- 2.2 Move the mouse to the Bluetooth symbol, click the right mouse button and select "Add Device";
- 2.3 After selecting "Add Device", the icon of the model of the device (PG-9028) will be searched in the dialog box.
- 2.4 Click "Next" and select "Do not use the code to match", it will be automatically added after confirmed, then remind the Bluetooth was connected successfully! After connected, the SEARCH indicator on the gamepad is always on!
- 2.5 Then you can play the downloaded simulator games runs in D-input mode on a Windows PC.

**Mouse touching pad function**


Support mouse touch function, can operate more conveniently under Android/ PC platform(Only by Bluetooth connecting).

1. Please move your finger slightly on the sensitive area if you want to move the cursor.
2. Please click the touching pad once slightly if you want to select an object.
3. If you want to double click an object, please focus the cursor on the object and double click.



**Charge/ Sleep/ Wake up function of Gamepad:**

1. Charge indicator will lit on while charging and will turn off after fully charged.
2. Sleep/Wake up function: Gamepad will enter into sleeping mode if not in use for 5 minute, and press HOME button for wake up and reconnect automatically.
3. Charge indicator flashing quickly for low battery remind



Charging port

**Operation instructions:**

Android system		
Bluetooth pairing buttons (Press and hold on 2's)	X+Home	Y+Home
Indicator	SEARCH	SEARCH
Remark	Freely dynamic swift to mouse mode from HID mode	

Windows system		
Bluetooth pairing buttons (Press and hold on 2's)	X+Home	
Indicator	SEARCH	
Remark	Need buy a Bluetooth 4.0 receiver	

**Electrical Parameters:**

1. Working voltage: DC3.7V	5. Charging voltage/current: DC5V/500mA
2. Working current: 30 mA	6. Bluetooth transmission distance: ≤8M
3. Continuous gameplay time: 10H	7. Battery capacity: 380mAh
4. Static current: <35uA	8. Standby time: up to 30days once fully charged

**Notes:**

1. Please do not store this product in wet or high-temperature areas.
2. Don't knap, beat, drub, pierce, or try to decompose this product, to avoid unnecessary damage to the product.
3. The product has built-in batteries, and please don't discard them together with the garbages.
4. Don't charge the controller in a place near the fire or other heat source.
5. Non professional personnel should not disassemble the product, otherwise it will not be covered in the after-sales warranty service.


**Frequency asked question to operate this Gamepad**

Q1: I opened Bluetooth searching, but still can't pair it with my device?  
 A1: Please turn off and ignore the previous connected device. Then reopen Bluetooth for connect. If you still can't connect, then please use the needle press the RESET button on the back of Gamepad for 5 seconds. Then reconnect the Bluetooth.

Q2: I can't turn on the Gamepad.  
 A2: Please recharge the Gamepad before you use it at the first time or use it again after a long period. Please check the charge indicator light turn on while charging and will turn off once fully charged. If the Charge indicator do not light on while charge cable connected to the power source, then please try to change a charge cable or use the needle press the RESET button on the back of Gamepad for 5 seconds.

Q3: Joystick moving itself or other buttons works improper when entered the game.  
 A3: Please use the needle press the RESET button on the back of Gamepad for 5 seconds. Please be reminded don't touch wrong buttons while Bluetooth pairing.

**Accessories List:**



Gamepad x1  
 User Manual x1  
 Micro USB cable x1

**iPega与ePega trademarks all belong to PEGA LIMITED.**  
 Patent NO.: ZL2014301708600